



# 4 ports FXS/FXO Analog Voice Gateway / IPPBX

**Model:AZ-4FXS FXO Analog Gateway**



## Overview:

Analog Gateway/IPPBX locates at the interface between PSTN and IP to achieve the conversion between FXO/FXS and VoIP SIP, meanwhile complete the media stream transformation between the bearer channel of PSTN and IP.

## Application:

Used for IPCC, IP Dispatch, Unify Communication, VoIP network, operators, and so on.

## Specification:

- Signaling: SS7, PRI, R2, CAS, Q.SIG, V5.2, and DPNSS;
- VoIP Protocol: SIP and H.248;
- Codec: G.711 U-Law and A-Law, G.711 Appendix 1, G.723.1 and G.723.1 Annex A, G.729 Annex A and Annex B, G.726-16, G.726-32, GSM, GSM-EFR, ARM, ARM-WB, ILBC;
- Fax Protocol: T30, T38, pass through;
- Network Protocol: IP, NAT, ICMP, ARP, HTTP, BOOTP, FTP, TFTP, DHCP, PPPOE, SNMP, Diff-Serv;
- Advanced Voice Processing Technology: Voice Activity Detection (VAD), Comfort Noise Generation (CNG), Echo Cancellation, DTMF, Caller ID, and Flexible input/output Gain Control.




## Physical Capacity and Specification:

Item	AZ-VOIP-4FXS/FXO
Analog FXS/ FXO Port	4FXO\FXS
E1 port (PCM)	0
VOIP IP Channels	4
SIP Subscribers	100
Ethernet Interface	2(10/100/1000M Base-T)
CONSOLE	1 (RS232 port)
SIP Compatibility	CISCO, Siemens, AVAYA, Huawei, ZTE, etc.
Input voltage	AC 110-240V
Power	15W
Telephone line transmission distance	5KM
Machine Dimension	240mm*145mm*25mm (1U)
Weight	3KG
Work Environment	0°C ~ 50°C, Less 80%




# Application Topology:

## 1. Basic application

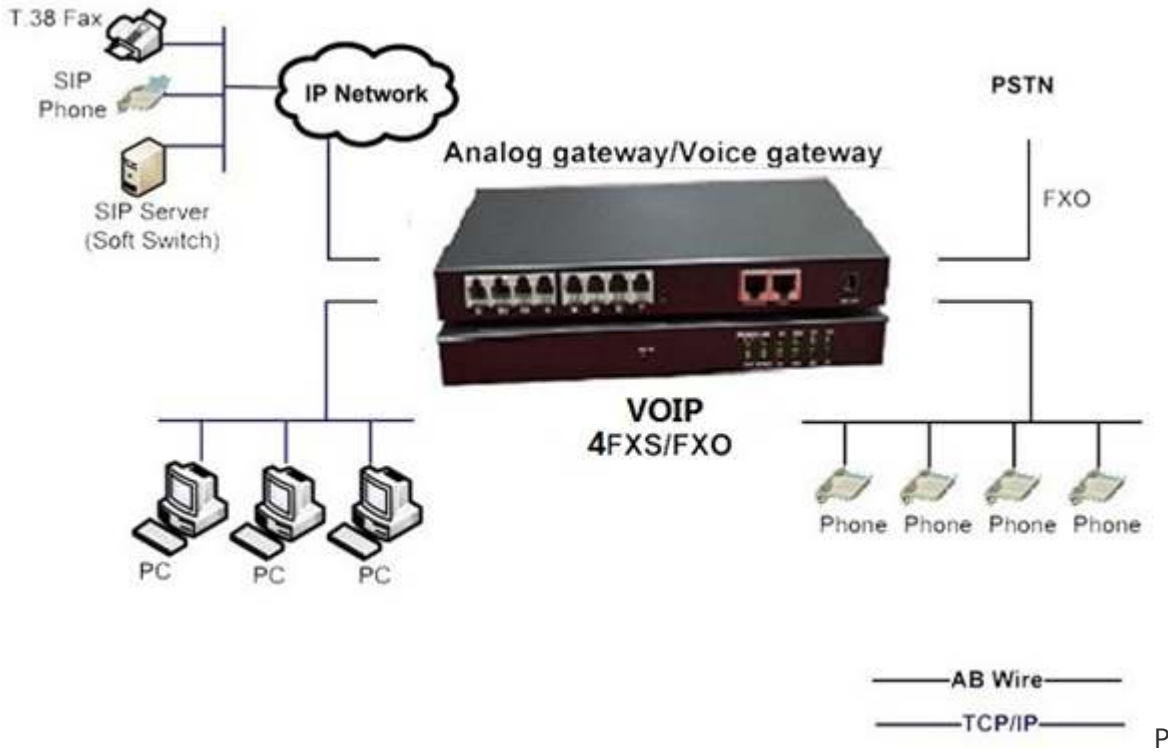

## 2. Connection for two different places/offices via FXS VoIP Gateway

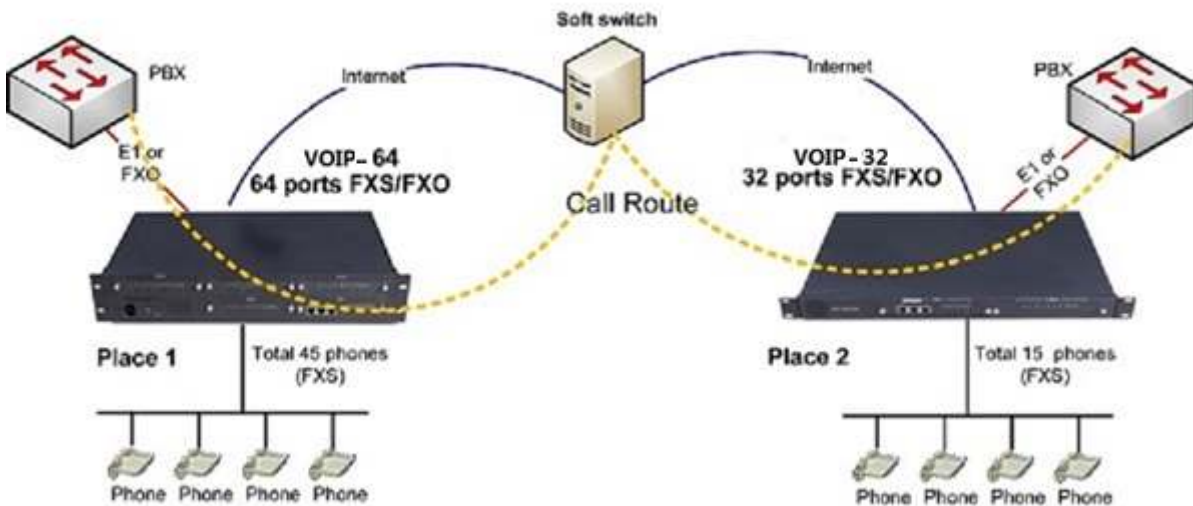



#### 4. Solutions for IP call center

